
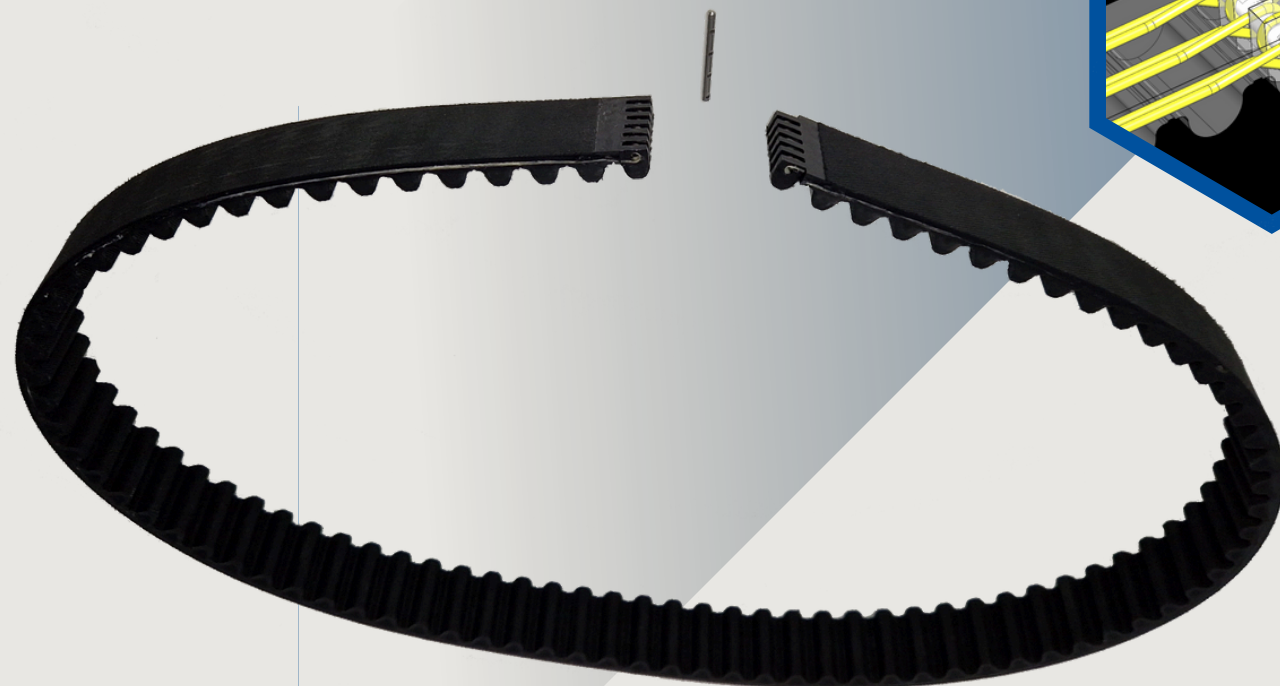
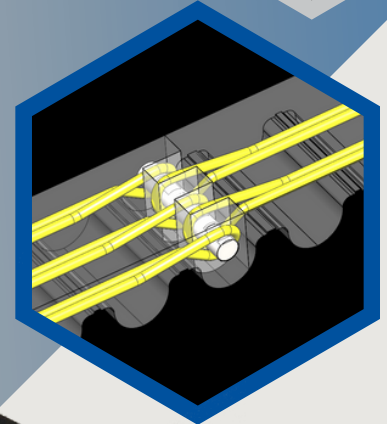


The Quick Fix Power Transmission Belt

Quick re-start
after a failure

HTD or Poly Chain
spockets

Continuous endless
cables

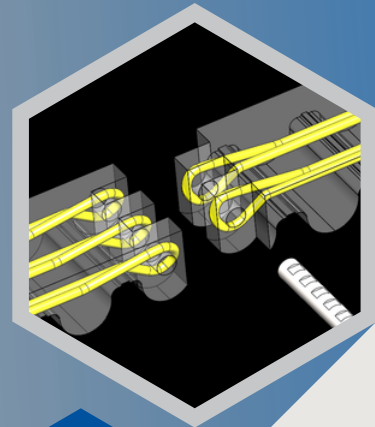

Lower stock Higher reactivity


With only 10 lengths in stock, build any length.

ERO Joint B1 standards	14M length	Teeth	Combinations
✓	560	40	560
✓	630	45	630
✓	700	50	700
✓	784	56	784
✓	826	59	826
✓	924	66	924
✓	966	69	966
✓	994	71	994
✓	1092	78	1092
✓	1120	80	1120
	1190	85	630+560
	1260	90	700+560
	1400	100	700+700
	1568	112	784+784
	1610	115	826+784
	1750	125	1120+630
	1778	127	994+784
	1890	135	966+924
	1960	140	994+966
	2100	150	700+700+700
	2240	160	1120+1120
	2310	165	1120+630+560
	2450	175	1120+700+630
	2520	180	1120+700+700
	2590	185	994+966+630
	2730	195	1120+826+784
	2800	200	1120+1120+560
	2828	202	1120+924+784
	3136	224	1120+1092+924
	3150	225	1092+1092+966
	3304	236	1120+1092+1092
	3360	240	1120+1120+1120
	3500	250	1120+1120+700+560
	3850	275	1120+1120+826+784
	3920	280	1120+1120+1120+560
	4004	286	1120+1092+1092+700
	4326	309	1120+1120+1120+966
	4410	315	1120+1120+826+784+560

Features and Options

Available width

from 7,5 mm to 255 mm

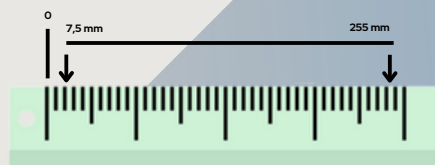

High Power Version



With Zylon® cables for special application
(Higher rigidity and no creep)

Pitch available



14M
8M

Plug and play belt



Only one hand to insert the pin

Video demo