


## ERO Joint® Solutions for Tire Industries Fast & Easy Assembly

### Polyurethane Timing Belts



ERO Joint® HP (Hinge Pin) as strong as a welded joint (patented)



ERO Joint® HP belts are available with all types of coating and all types of guiding or machining. Mechanical strength and lifetime are greater than any other mechanical fastening systems. Widths from 10 to 200 mm.

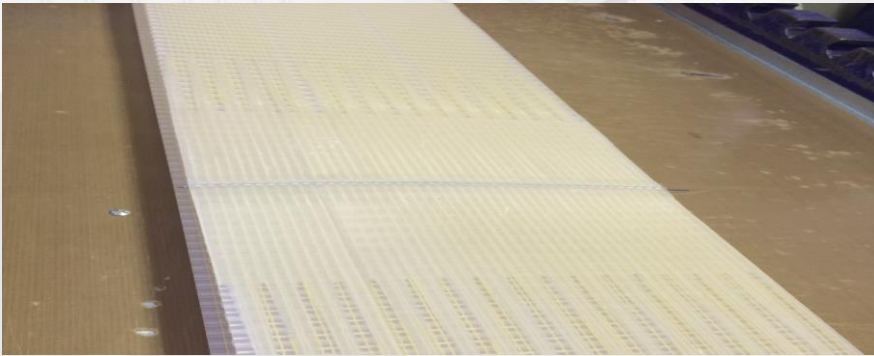


Above: 180 WT10 4730 grinded (vulcanization – transportation of rubber sheet)

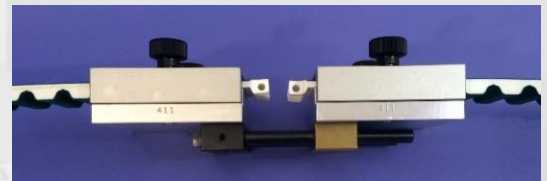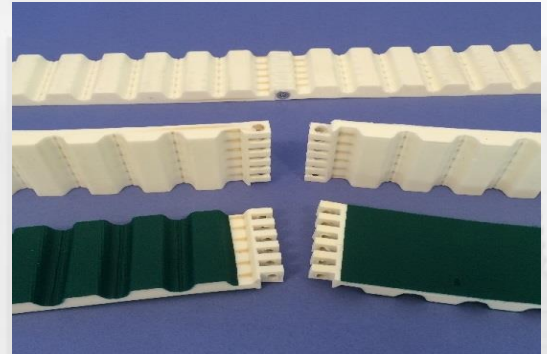


For systems without tensioning device, we can propose a tensioning tool

### ERO Joint® WT (Wide Timing) for large belts and ERO Joint® for conveyor belts (patented)

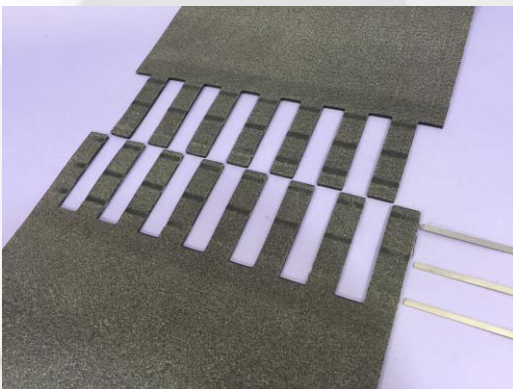

Grey woven felt conveyor belt (calendering)

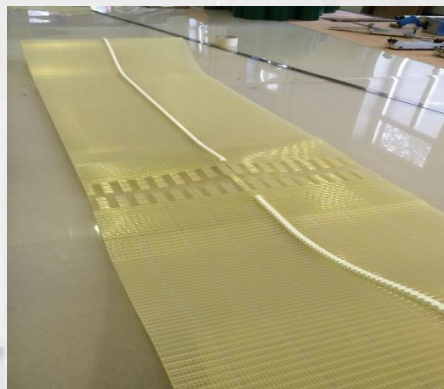

550 WT10 5820 longitudinal joint + V-Guide (confection & loading)



375 WT10 7500 NT+NB (vulcanization – transportation of rubber sheet)

ERO joint® solution is available for **all types of conveyor belts.**

Every belts are cleaned with a specific depollution protocol to avoid rubber contamination.

For more information, visit our website: [www.ero-joint.com](http://www.ero-joint.com)

March 19